

## CONTACT SPECIFICATIONS

Contact form	3Z,3H,3D
Contact resistance	≤ 100MΩ(1A 6VDC)
Contact material	AgCdO, AgSnO <sub>2</sub>
Contact capacity	5A 250VAC/30VDC 3A 250VAC/30VDC

## TECHNICAL SPECIFICATIONS

Insulation resistance	≥500MΩ 500VDC
Ambient temperature	-40°C~+70°C (No condensation)
Dielectric strength	Between coil and contact ≥1500VAC1min
	Between open contacts≥1000VAC1min
	Between contacts≥1500VAC1min
Operate / Release time	≤25ms/25ms
Terminal type	Socket mounting

## AC COIL DATA


Code	Nominal voltage VAC	Operate voltage VAC	Release voltage VAC	Coil resistance (Ω±10%)
36.04-024-AC	24	19.2	7.20	168
36.04-110-AC	110	96.0	36.0	3500
36.04-220-AC	220/240	176.0	66.0	14000

## DC COIL DATA

Code	Nominal voltage VAC	Operate voltage VAC	Release voltage VAC	Coil resistance (Ω±10%)
36.04-12-DC	12	9.6	1.2	160
36.04-024-DC	24	19.2	2.4	640

## COIL SPECIFICATIONS

Rated coil power	0.9W/1.2VA
------------------	------------

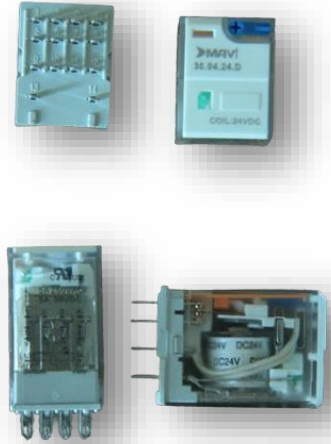


**SOCKET TYPE**  
**GENERAL PURPOSE RELAY 14 PIN**  
**36.04**



**MATCHED SOCKET**  
**RELAY SOCKET 14 PINS**  
**(With LED & test mechanism)**

**SOCKET TYPE OUTLINE DIMENSION 36.04**

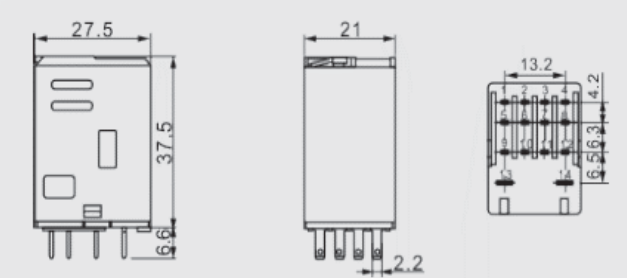

**4Z WIRING DIAGRAM (BOTTOM VIEW)**

