



## AHC615 series Digital yearly time switch

AHC615 series divided the programs into four periods for one year, each period can be set 10 groups of ON-OFF programs or 15 times of pulsation programs, cycle by monthly, daily or weekly.

### Application

AHC615 series fits for the particular use of the following tasks: Illumination of private and industrial areas, street and shop-window lightening, regulation of air conditioning, flushing, motors, pumps, plants and machinery as well as to simulate presence etc.

### Description

● AHC615:1 channels;AHC616:2 channels	● Built-in calendar: 2019 - 2049 years.
● Daily, weekly and monthly programs	● EU and custom Daylight Saving Time.
● 10 groups of ON/OFF program	● 15 times of pulsation program (1s-59s)
● DIN35mm standard rails	● 4 years battery reserve
● AHC615L series: with backligh.	
● Accumulated working hours and action numbers can be viewed.	
● Built-in lithium battery, keep working when power failure.	

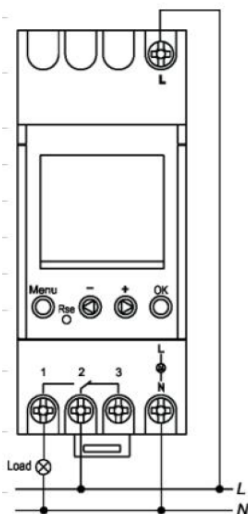
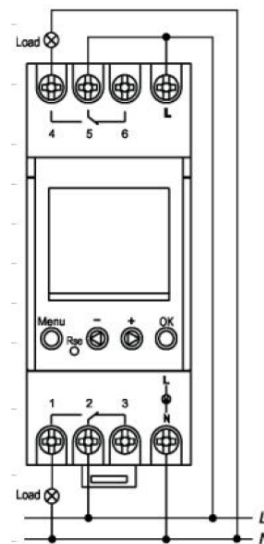
### Technical date

Supply voltage	230Vac, 50Hz other voltages on request
Switching capacity (per channel)	resistive load: 16 A / 250 V~ at $\cos\varphi=1$
	inductive load: 10 A / 250 V~ at $\cos\varphi=0,6$
Minimum interval	1 Min.
Time accuracy at 25 °C	$\leq \pm 2$ Sek./day (quartz)
Power reserve	approx. 4 years
Housing and insulation material	Self-extinguishing thermoplastic
Type of protection	IP 20
Class of protection	II according to EN 60 730-1
Permitted ambient temperature	-10 ~ +50 °C (non-icing)
Test approval	CE

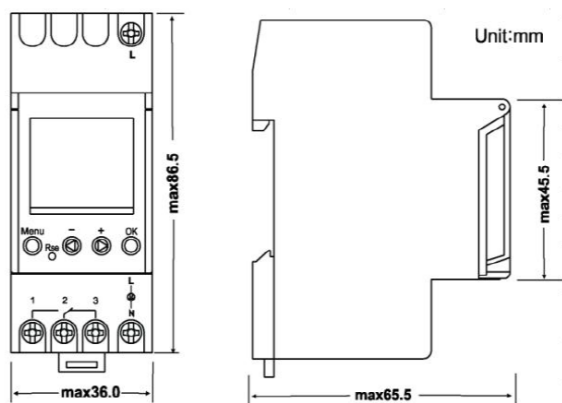
## Maximum recommended load (10,000 operations)

Filament / Halogen lamp 230V	Compact Fluorescent Lamp	LED lamp 230V > 5 W	Fluorescent lamp with electronic ballast	Fluorescent lamp uncompensated	Fluorescent lamp series compensated	Fluorescent lamp parallel compensated
2600 W	200 W	200 W	650 W	1000 W	1000 W	550 W

## Wiring diagram

**AHC615**

**AHC616**


## Dimensions

**AHC615**

**AHC616**
